



DN 15 - DN 100 CLASS 1500 (PN 250)


TAM GEÇİŞLİ / FLANŞLI
FULL BORE/FLANGED

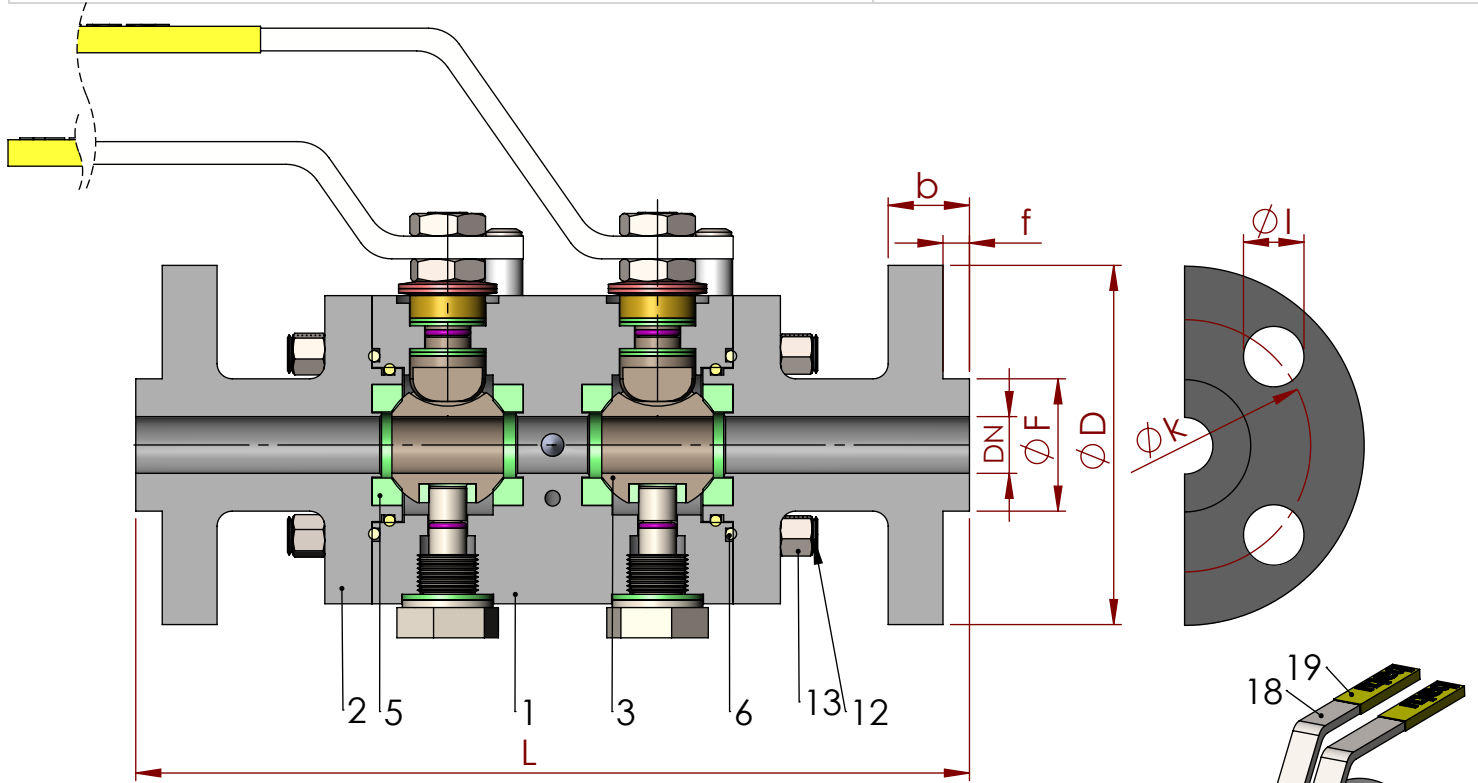

NO ITEM NO	PARÇA ADI ITEM DESCRIPTION	MALZEME MATERIAL
19	PLASTİK KAPLAMA	PLASTIC COVERING
18	KÜRE HAREKET KOLU	BALL ACTION HANDLE
17	İĞNELİ VANA	NEEDLE VALVE
16	VENT	VENT
15	CİVATA	BOLT
14	STOPLAMA PİMİ	STOPPING PIM
13	SOMUN	NUT
12	SAPLAMA	STUD
11	KONTRA SOMUN	COUNTER NUT
10	ÇANAK PUL	BOWL WASHER
9	BASKI RINGİ	PRESSURE RING
8	MİL O-RINGİ	SPINDLE O-RING
7	BOĞAZ SIZDIRMAZLIK TEFLONU	NECK TIGHTNESS ELEMENT
6	GÖVDE SIZDIRMAZLIK TEFLONU	BODY TIGHTNESS O - RING
5	KÜRE SIZDIRMAZLIK TEFLONU	BALL TIGHTNESS ELEMENT
4	HAREKET MİLİ	ACTION SPINDLE
3	KÜRE	BALL
2	KAPAK	COVER
1	GÖVDE	BODY

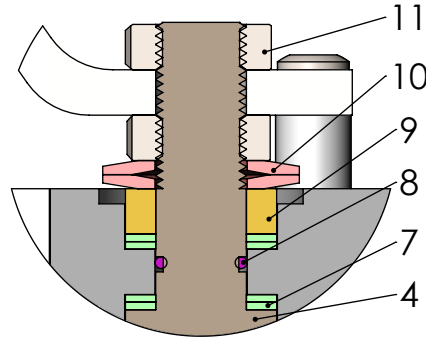

Dizayn	Design	: API 6D / ISO 14313
Boyut	Dimensions	: ASME B 16.10
Bağlantılar	Connections	: ASME B 16.5
Çalışma Basıncı	Working Pressure	: CLASS 1500 (PN 250)
Çalışma Sıcaklığı	Working Temperature	: -29 °C/ +180 °C



BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES

		CLASS 1500 (PN 250)							
		L	f	D	b	k	HOLE UNIT	I	F
DN 15	<i>R 1/2"</i>	276	7	120	29,3	82,6	4	22,5	35,1
DN 20	<i>R 3/4"</i>	287	7	130	32,4	88,9	4	22,5	42,9
DN 25	<i>R 1"</i>	330	7	150	35,6	101,6	4	25,4	50,8
DN 40	<i>R 1-1/2"</i>	400	7	180	38,8	123,8	4	28,6	73,2
DN 50	<i>R 2"</i>	464	7	215	45,1	165,1	8	25,4	91,9
DN 80	<i>R 3"</i>	697	7	265	54,7	203,2	8	31,8	127
DN100	<i>R 4"</i>	827	7	310	61	241,3	8	34,9	157,2

* Please contact us for sizes upper than 4"