
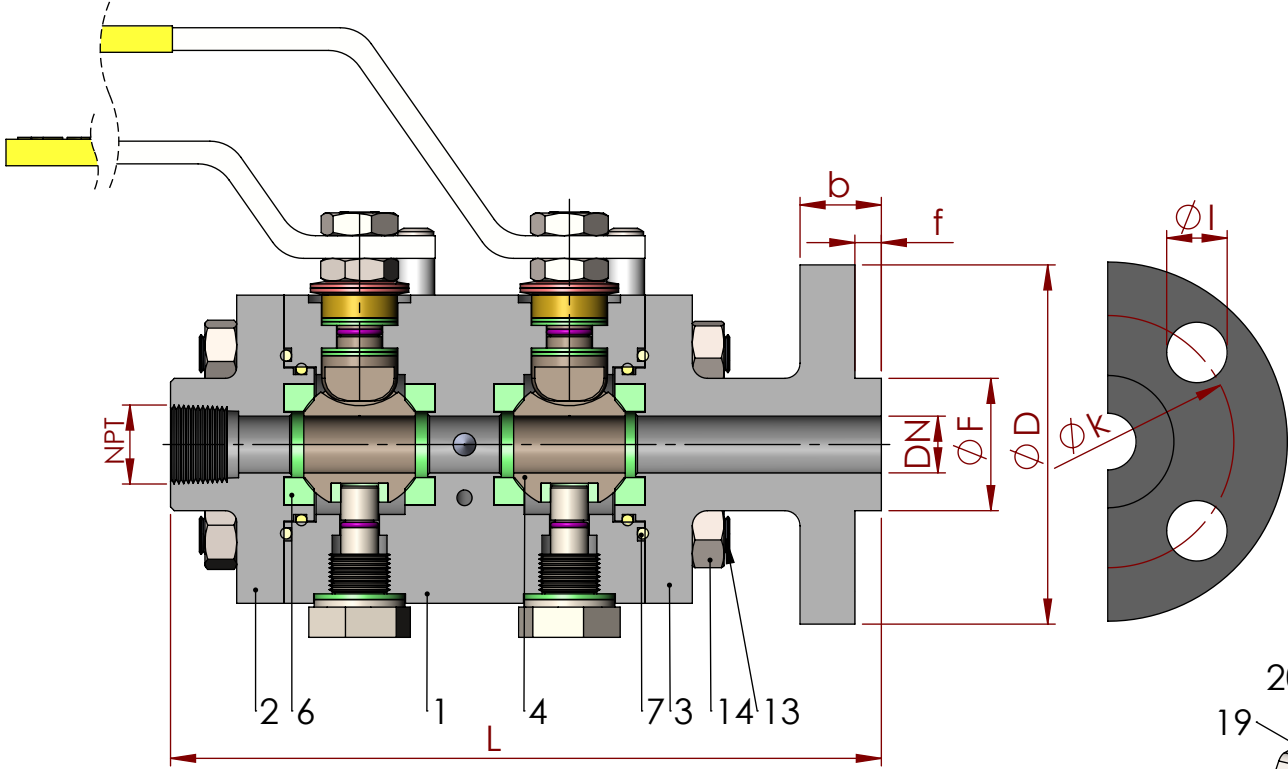


DN 15 - DN 80 CLASS 1500 (PN 250)
TAM GEÇİŞLİ / FLANŞ - DIŞLI
FLANGED - FEMALE NPT THREADED


NO ITEM NO	PARÇA ADI ITEM DESCRIPTION	MALZEME MATERIAL
20	PLASTİK KAPLAMA	PLASTIC COVERING
19	KÜRE HAREKET KOLU	BALL ACTION HANDLE
18	İĞNELİ VANA	NEEDLE VALVE
17	VENT	VENT
16	CİVATA	BOLT
15	STOPLAMA PİMİ	STOPPING PIM
14	SOMUN	NUT
13	SAPLAMA	STUD
12	KONTRA SOMUN	COUNTER NUT
11	ÇANAK PUL	BOWL WASHER
10	BASKI RINGİ	PRESSURE RING
9	MİL O-RINGİ	SPINDLE O-RING
8	BOĞAZ SIZDIRMAZLIK TEFLONU	NECK TIGHTNESS ELEMENT
7	GÖVDE SIZDIRMAZLIK TEFLONU	BODY TIGHTNESS O - RING
6	KÜRE SIZDIRMAZLIK TEFLONU	BALL TIGHTNESS ELEMENT
5	HAREKET MİLİ	ACTION SPINDLE
4	KÜRE	BALL
3	KAPAK	COVER
2	KAPAK	COVER
1	GÖVDE	BODY

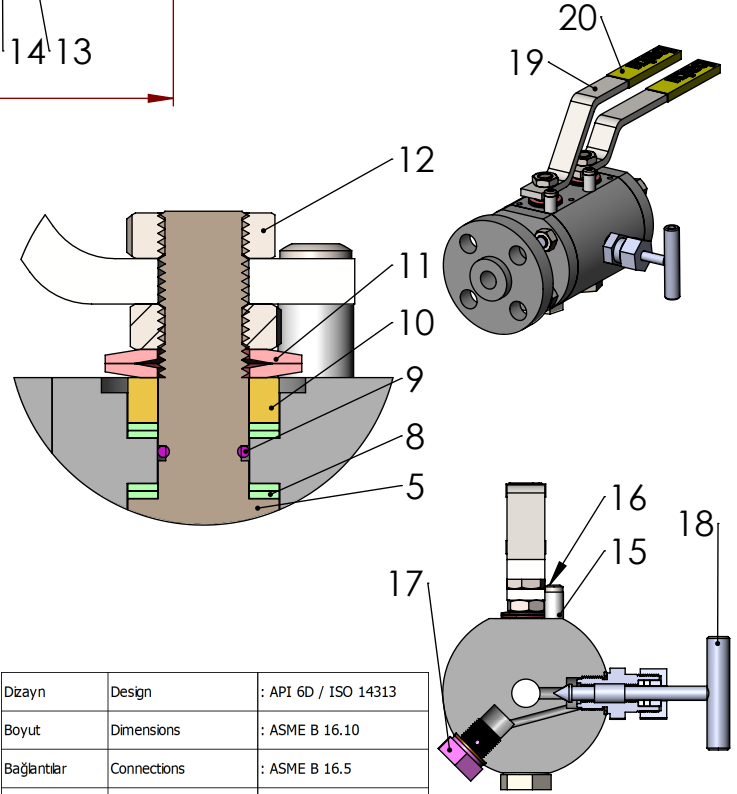

Dizayn	Design	: API 6D / ISO 14313
Boyut	Dimensions	: ASME B 16.10
Bağlantılar	Connections	: ASME B 16.5
Çalışma Basıncı	Working Pressure	: CLASS 1500 (PN 250)
Çalışma Sıcaklığı	Working Temperature	: -29 °C/ +180 °C

BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES
CLASS 1500 (PN 250)

		L	f	D	b	k	HOLE UNIT	I	F
DN 15	R 1/2"	221	7	120	29,3	82,6	4	22,5	34,9
DN 20	R 3/4"	224	7	130	32,4	88,9	4	22,5	42,9
DN 25	R 1"	231	7	150	35,6	101,6	4	25,4	50,8
DN 40	R 1-1/2"	235	7	180	38,8	123,8	4	28,6	73
DN 50	R 2"	239	7	215	45,1	165,1	8	25,4	92,1
DN 80	R 3"	254	7	265	54,7	203,2	8	31,8	127