
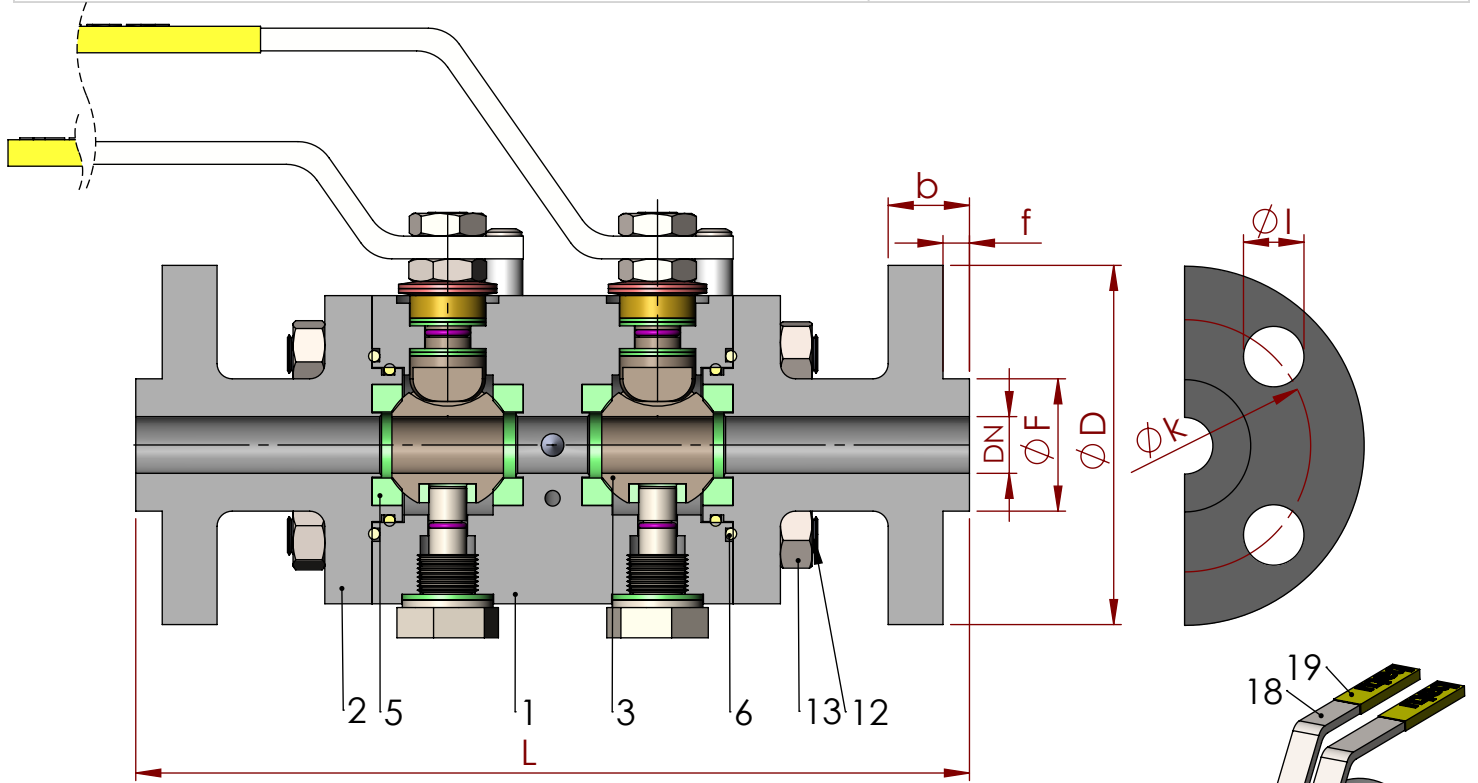
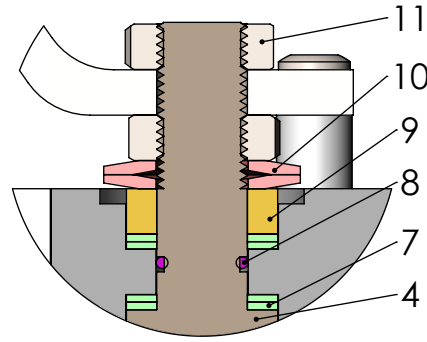


**DN 15 - DN 100 CLASS 300 ( PN 50 )**
**TAM GEÇİŞLİ / FLANŞLI**  
**FULL BORE/FLANGED**


| NO<br>ITEM NO | PARÇA ADI<br>ITEM DESCRIPTION | MALZEME<br>MATERIAL     |
|---------------|-------------------------------|-------------------------|
| 19            | PLASTİK KAPLAMA               | PLASTIC COVERING        |
| 18            | KÜRE HAREKET KOLU             | BALL ACTION HANDLE      |
| 17            | İĞNELİ VANA                   | NEEDLE VALVE            |
| 16            | VENT                          | VENT                    |
| 15            | CİVATA                        | BOLT                    |
| 14            | STOPLAMA PİMİ                 | STOPPING PIM            |
| 13            | SOMUN                         | NUT                     |
| 12            | SAPLAMA                       | STUD                    |
| 11            | KONTRA SOMUN                  | COUNTER NUT             |
| 10            | ÇANAK PUL                     | BOWL WASHER             |
| 9             | BASKI RINGİ                   | PRESSURE RING           |
| 8             | MİL O-RINGİ                   | SPINDLE O-RING          |
| 7             | BOĞAZ SIZDIRMAZLIK TEFLONU    | NECK TIGHTNESS ELEMENT  |
| 6             | GÖVDE SIZDIRMAZLIK TEFLONU    | BODY TIGHTNESS O - RING |
| 5             | KÜRE SIZDIRMAZLIK TEFLONU     | BALL TIGHTNESS ELEMENT  |
| 4             | HAREKET MİLİ                  | ACTION SPINDLE          |
| 3             | KÜRE                          | BALL                    |
| 2             | KAPAK                         | COVER                   |
| 1             | GÖVDE                         | BODY                    |



|                   |                     |                      |
|-------------------|---------------------|----------------------|
| Dizayn            | Design              | : API 6D / ISO 14313 |
| Boyut             | Dimensions          | : ASME B 16.10       |
| Bağlantılar       | Connections         | : ASME B 16.5        |
| Çalışma Basıncı   | Working Pressure    | : CLASS 300 (PN 50)  |
| Çalışma Sıcaklığı | Working Temperature | : -29 °C/ +180 °C    |


**BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES**

|              |                 | CLASS 300 ( PN 50 ) |   |     |      |       |           |      |       |
|--------------|-----------------|---------------------|---|-----|------|-------|-----------|------|-------|
|              |                 | L                   | f | D   | b    | k     | HOLE UNIT | I    | F     |
| <b>DN 15</b> | <b>R 1/2"</b>   | 214                 | 2 | 95  | 14,3 | 66,7  | 4         | 15,7 | 35,1  |
| <b>DN 20</b> | <b>R 3/4"</b>   | 221                 | 2 | 115 | 15,9 | 82,6  | 4         | 19,1 | 42,9  |
| <b>DN 25</b> | <b>R 1"</b>     | 238                 | 2 | 125 | 17,5 | 88,9  | 4         | 19,1 | 50,8  |
| <b>DN 40</b> | <b>R 1-1/2"</b> | 288                 | 2 | 155 | 20,7 | 114,3 | 4         | 22,4 | 73,2  |
| <b>DN 50</b> | <b>R 2"</b>     | 336                 | 2 | 165 | 22,3 | 127   | 8         | 19,1 | 91,9  |
| <b>DN 80</b> | <b>R 3"</b>     | 400                 | 2 | 210 | 28,6 | 168,3 | 8         | 22,4 | 127   |
| <b>DN100</b> | <b>R 4"</b>     | 465                 | 2 | 255 | 31,8 | 200   | 8         | 22,4 | 157,2 |

\* Please contact us for sizes upper than 4"