
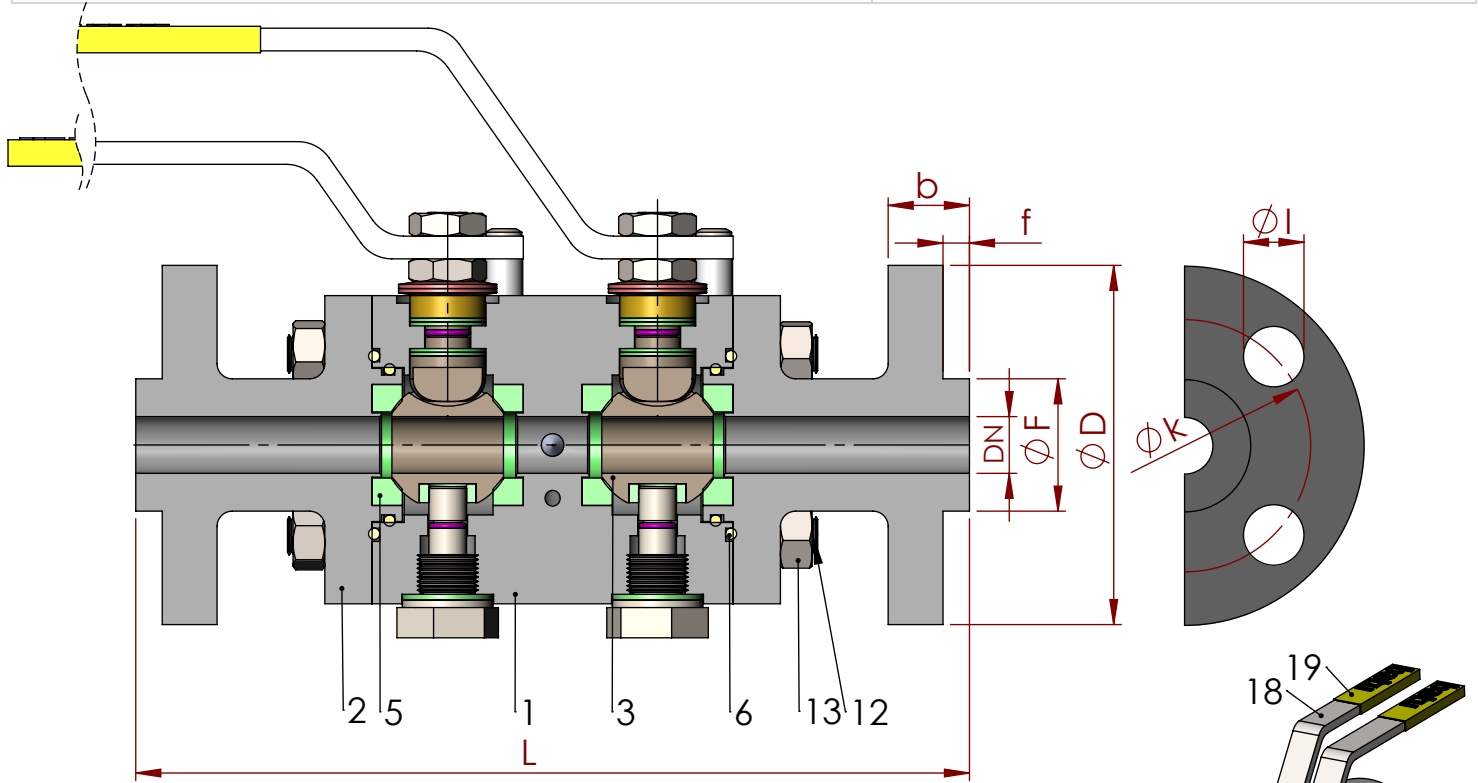
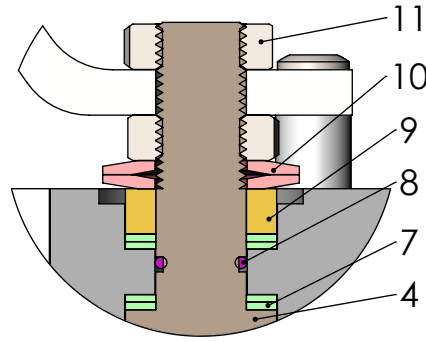


DN 15 - DN 100 CLASS 900(PN 150)
TAM GEÇİŞLİ / FLANŞLI
FULL BORE/FLANGED


NO ITEM NO	PARÇA ADI ITEM DESCRIPTION	MALZEME MATERIAL
19	PLASTİK KAPLAMA	PVC
18	KÜRE HAREKET KOLU	ST 37
17	İĞNELİ VANA	AISI 304
16	VENT	AISI 304
15	CİVATA	ST 42
14	STOPLAMA PİMİ	ST 42
13	SOMUN	5.6.
12	SAPLAMA	4140-5140
11	KONTRA SOMUN	AISI 304
10	ÇANAK PUL	AISI 304
9	BASKI RINGİ	AISI 304
8	MİL O-RINGİ	VITON
7	BOĞAZ SIZDIRMAZLIK TEFLONU	PTFE
6	GÖVDE SIZDIRMAZLIK TEFLONU	VITON
5	KÜRE SIZDIRMAZLIK TEFLONU	PTFE
4	HAREKET MİLİ	ASTM A 105
3	KÜRE	AISI 316
2	KAPAK	ASTM A 105
1	GÖVDE	ASTM A 105

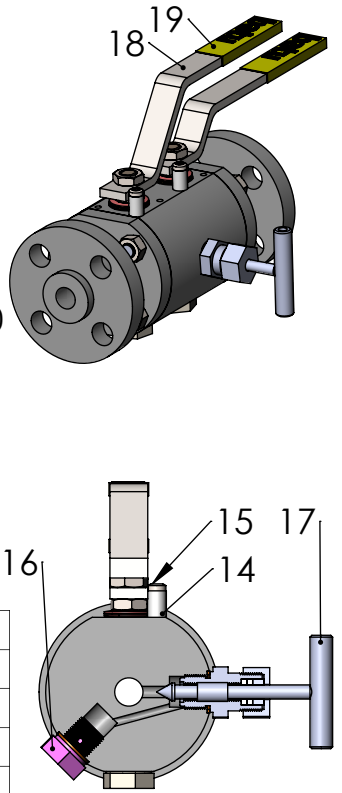

Dizayn	Design	: API 6D / ISO 14313
Boyut	Dimensions	: ASME B 16.10
Bağlantılar	Connections	: ASME B 16.5
Çalışma Basıncı	Working Pressure	: CLASS 900 (PN 150)
Çalışma Sıcaklığı	Working Temperature	: -29 °C/ +180 °C


BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES

		CLASS 900 (PN 150)							
		L	f	D	b	k	HOLE UNIT	I	F
DN 15	<i>R 1/2"</i>	276	7	120	29,3	82,6	4	22,4	35,1
DN 20	<i>R 3/4"</i>	287	7	130	32,4	88,9	4	22,4	42,9
DN 25	<i>R 1"</i>	330	7	150	35,6	101,6	4	25,4	50,8
DN 40	<i>R 1-1/2"</i>	400	7	180	38,8	123,8	4	25,4	73,2
DN 50	<i>R 2"</i>	464	7	215	45,1	165,1	8	28,4	91,9
DN 80	<i>R 3"</i>	647	7	240	45,1	190,5	8	25,4	127
DN100	<i>R 4"</i>	747	7	290	51,5	235	8	31,8	157,2

* Please contact us for sizes upper than 4"