
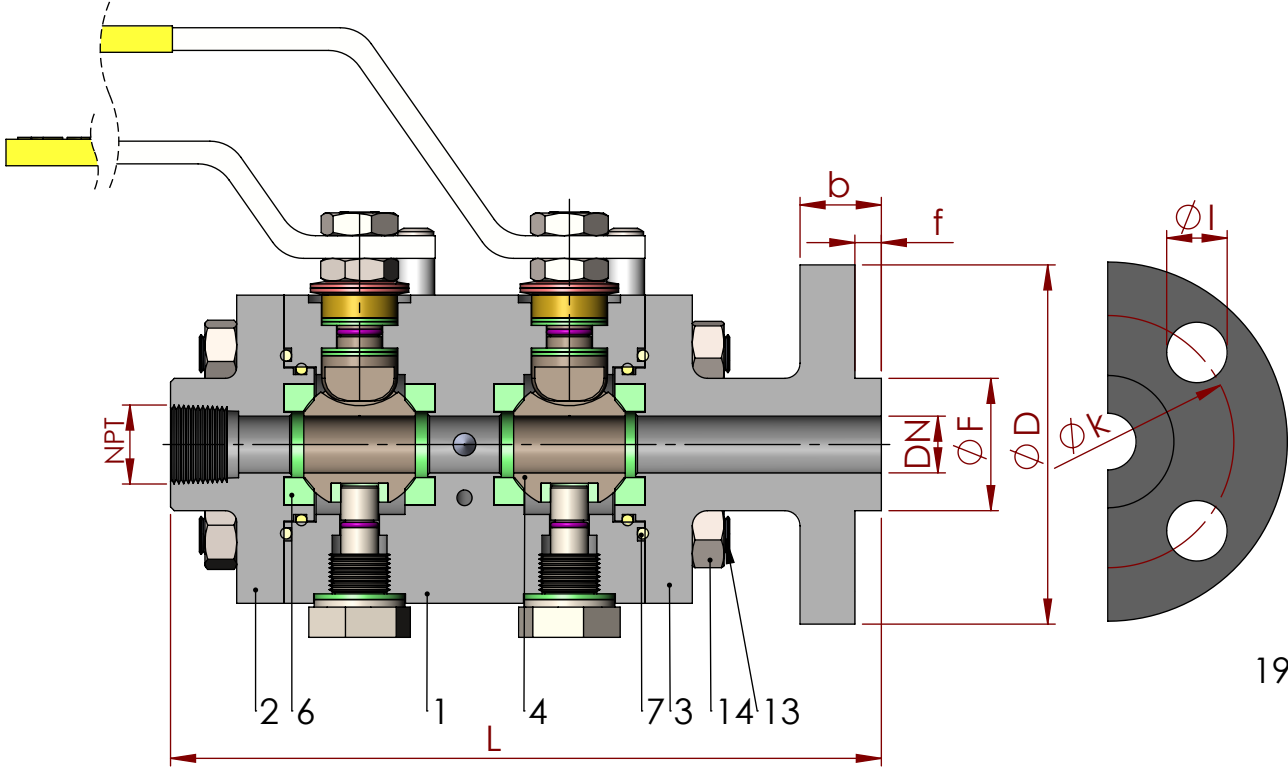




DN 15 - DN 80 CLASS 900 (PN 150)
TAM GEÇİŞLİ / FLANŞ - DIŞLI
FLANGED - FEMALE NPT THREADED


NO	PARÇA ADI		MALZEME
ITEM NO	ITEM DESCRIPTION		MATERIAL
20	PLASTİK KAPLAMA	PLASTIC COVERING	PVC
19	KÜRE HAREKET KOLU	BALL ACTION HANDLE	ST 37
18	İĞNELİ VANA	NEEDLE VALVE	AISI 304
17	VENT	VENT	AISI 304
16	CİVATA	BOLT	ST 42
15	STOPLAMA PİMİ	STOPPING PIM	ST 42
14	SOMUN	NUT	5.6.
13	SAPLAMA	STUD	4140-5140
12	KONTRA SOMUN	COUNTER NUT	AISI 304
11	ÇANAK PUL	BOWL WASHER	AISI 304
10	BASKI RINGİ	PRESSURE RING	AIS 304
9	MİL O-RINGİ	SPINDLE O-RING	VITON
8	BOĞAZ SIZDIRMAZLIK TEFLONU	NECK TIGHTNESS ELEMENT	PTFE
7	GÖVDE SIZDIRMAZLIK TEFLONU	BODY TIGHTNESS O - RING	VITON
6	KÜRE SIZDIRMAZLIK TEFLONU	BALL TIGHTNESS ELEMENT	PTFE
5	HAREKET MİLİ	ACTION SPINDLE	ASTM A 105
4	KÜRE	BALL	AISI 316
3	KAPAK	COVER	ASTM A 105
2	KAPAK	COVER	ASTM A 105
1	GÖVDE	BODY	ASTM A 105

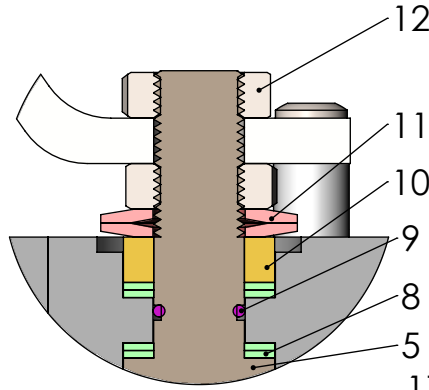

Dizayn	Design	: API 6D / ISO 14313
Boyut	Dimensions	: ASME B 16.10
Bağlantılar	Connections	: ASME B 16.5
Çalışma Basıncı	Working Pressure	: CLASS 900 (PN 150)
Çalışma Sıcaklığı	Working Temperature	: -29 °C/ +180 °C

BOYUTLAR ve ÖLÇÜLER DIMENSIONS AND CONNECTION SIZES
CLASS 900 (PN 150)

		L	f	D	b	k	HOLE UNIT	I	F
DN 15	R 1/2"	221	7	120	29,3	82,6	4	22,4	35,1
DN 20	R 3/4"	224	7	130	32,4	88,9	4	22,4	42,9
DN 25	R 1"	231	7	150	35,6	101,6	4	25,4	50,8
DN 40	R 1-1/2"	235	7	180	38,8	123,8	4	28,4	73,2
DN 50	R 2"	239	7	215	45,1	165,1	8	25,4	91,9
DN 80	R 3"	244	7	240	45,1	190,5	8	25,4	127